

0 4. 12. 03

PA 970036

REC'D 17 DEC 2003

WIPO

PCT

THE UNITED STATES OF AMERICA**TO ALL TO WHOM THESE PRESENTS SHALL COME;****UNITED STATES DEPARTMENT OF COMMERCE****United States Patent and Trademark Office****March 05, 2003**

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE UNDER 35 USC 111.**

APPLICATION NUMBER: 60/433,364**FILING DATE: *December 13, 2002***

**PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)**

**By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS**



**L. EDELEN
Certifying Officer**

Please type a plus sign (+) inside this box → ☐

12-16-2002 12/13/02

PTO/SB/18 (02-01)

Approved for use through 10/31/2002. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EL 827 840 796 US

Date of Deposit: 13-Dec-2002

INVENTOR(S)

Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
John S. Mark W.	Henry Laramie	Knoxville, TN Knoxville, TN

☒ Additional inventors are being named on the page 2 separately numbered sheets attached hereto

TITLE OF THE INVENTION (280 characters max)

AUTOMATIC GAMMA CORRECTION FOR MATRIX DISPLAY

CORRESPONDENCE ADDRESS

Direct all correspondence to:

☒ Customer Number

24737

Place Customer Number
Bar Code Label here

OR

Type Customer Number here

☒

Firm or
Individual Name

KONINKLIJKE PHILIPS ELECTRONICS N. V.

Address

Philips Electronics N. A. Corp

Address

580 White Plains Road

City

Tarrytown

State

NY

ZIP

10591

Country

USA

Telephone

914-332-0222

Fax

914-332-0615

ENCLOSED APPLICATION PARTS (check all that apply)

☒ Specification Number of Pages

10

☐ CD(s), Number

☒ Drawing(s) Number of Sheets

2

☐ Other (specify)

☐ Application Data Sheet. See 37 CFR 1.76

METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)

☐ Applicant claims small entity status. See 37 CFR 1.27.

☐ A check or money order is enclosed to cover the filing fees

☒ The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:

14-1270

FILING FEE
AMOUNT (\$)

\$160

☐ Payment by credit card. Form PTO-2038 is attached.

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____

Respectfully submitted

SIGNATURE

Edward W. Goodman

Date

12-Dec-2002

TYPED or PRINTED NAME

Edward W. Goodman

REGISTRATION NO.
(if appropriate)

28,613

Docket Number:

US020565

TELEPHONE 914 333-9611

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C., 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

12-11-37 11:30 AM

Approved for use through 10/31/2002. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Docket Number	US020565	Type a plus sign (+) inside this box →	+
---------------	----------	---	---

Number 2 of 2

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

US??????

AUTOMATIC GAMMA CORRECTION FOR A MATRIX DISPLAY

BACKGROUND OF THE INVENTION

Field Of The Invention

[0001] The subject invention relates to adjusting the picture settings of a matrix display in order to compensate for changes in the ambient light.

Description Of The Related Art

[0002] The observable quality of picture on a display is highly dependent on the amount of ambient light in the room containing the display. For example, in movie theaters, it is customary for the proprietor to lower, if not extinguish, the house lights in order to achieve the best possible picture. However, in a home environment, extinguishing the lights is not practicable. Rather, the display, for example, a television receiver contains controls accessible by the user for adjusting the picture to compensate for the amount of ambient light. This ordinarily involves adjusting the contrast of the displayed picture. Since the room lighting may change over the course of time, it is necessary for the user to repeatedly adjust the contrast of the displayed picture.

[0003] U.S. Patent 4,769,708 discloses a manual and automatic ambient light sensitive picture control for a television receiver in which a sensor measures the amount of ambient light and adjusts the contrast of the displayed picture accordingly. In this television receiver, the display device is a cathode ray tube.

[0004] Applicants have found that in the case of a display with limited light output, for example, a liquid crystal display (LCD) or a plasma display panel, adjusting the contrast leads to a degradation in the picture quality.

SUMMARY OF THE INVENTION

[0005] It is an object of the invention to provide automatic picture setting adjustment for a matrix type display to compensate for changes in the ambient light. This object is achieved in an automatic picture setting adjustment circuit comprising a source for color video signals; adjustable gamma correction circuits for each of said color signals, each of said adjustable gamma correction circuits having a control input for receiving a control signal for

US??????

controlling an amount of gamma correction performed; and an ambient light sensing circuit for generating the control signal in dependence on a detected amount of ambient light.

[0006] Applicants have found that in a matrix type display it is best to maintain the contrast at an optimum setting. Rather, in order to adjust the gray level to luminance, gamma correction should instead be adjusted. Gamma correction is the voltage level to luminance level transfer function that is applied to a video signal. Gamma correction compensates for differences in the overall end-to-end linearity of light functions. Video signals already contain a fixed amount of gamma correction that is utilized by cathode ray tubes. For a matrix display, this fixed amount of gamma correction is removed and an appropriate amount of gamma correction is then added to the video signals. By varying the amount of gamma correction in dependence on the ambient light, the picture quality may be adjusted to achieve the best possible picture.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] With the above and additional objects and advantages in mind as will hereinafter appear, the invention will be described with reference to the accompanying drawings, in which:

[0008] Fig. 1 shows a first embodiment of the automatic picture setting adjustment circuit in accordance with the invention;

[0009] Fig. 2 shows an embodiment of an adjustable gamma correction circuit; and

[0010] Fig. 3 shows a second embodiment of the automatic picture setting adjustment circuit in accordance with the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0011] As shown in Fig. 1, inputs 10, 12, 14 and 16 receive a luminance signal Y and color difference signal R-Y, B-Y and G-Y, respectively. A matrix circuit 20 generates color video signals R, G and B from the luminance and color difference signals. The color video signals are applied to respective adjustable gamma correction circuits 22, 24 and 26. The outputs from these adjustable gamma correction circuits are applied to a display driving circuit 28 for providing the driving signals for a matrix type display 30.

[0012] The adjustable gamma correction circuits 22, 24 and 26 have gamma control

US??????

inputs connected to the outputs of adder circuits 32, 34 and 36 which receive, at respective first inputs, preset gamma control signals from presetting circuit 38. The second inputs of adder circuits 32, 34 and 36 are collectively connected to the output of another adder circuit 40 which receives a user gamma control signal at user input 42 indicative of a user setting of the overall gamma correction. In addition, the adder circuit 40 receives an ambient light gamma control signal from an ambient light sensing circuit 44. The ambient light sensing circuit 44 includes the parallel arrangement of a light sensor 46 and a resistor R1, arranged in series with a second resistor R2 between a reference voltage source +V_{REF} and ground.

[0013] In operation, the manufacturer of a display device incorporating the subject invention pre-adjusts the correction levels of each of the adjustable gamma correction circuits 22, 24 and 26, using the presetting circuit 38. A user of the display device may then achieve a degree of adjustment of the overall gamma correction by operating a user control (not shown) connected to the user input. Finally, the ambient light sensing circuit 44, in which the light sensor 46 is arranged conveniently to detect the ambient light outside of the cabinet of the display device, applies a variable ambient light gamma control signal to the adder 40 depending on the amount of ambient light.

[0014] An embodiment of the adjustable gamma correction circuits 22, 24 and 26 is shown in U.S. Patent 5,889,565. In particular, as shown in Fig. 2, the video signal is applied a log amplifier 50. A variable gain amplifier 52 has an input connected to the output of the log amplifier 50 and a control input 54 for receiving the gamma control value. Finally, an anti-log amplifier 56 has an input connected to an output of the variable gain amplifier 52 and an output for supplying the gamma corrected video signal. While each of these components are separately available, it has been found that in order for the log and anti-log amplifiers 50 and 56 to cooperate properly, they must be maintained at the same temperature. Hence, the log and anti-log amplifiers 50 and 56 should be formed on a same integrated circuit chip. To that end, it would be convenient to form the variable gain amplifier 52 on the same chip. As a further convenience, all of the adjustable gamma correction circuits 22, 24 and 26 may be formed on the same integrated circuit chip.

[0015] Fig. 3 shows a second embodiment of the automatic picture setting adjustment circuit. In particular, the adjustable gamma correction circuits 22', 24' and 26' are in the form of look-up tables (LUT), wherein the color video signals R, G, B are applied as address signals.

US?????

The LUT's 22', 24' and 26' are coupled to a microprocessor 60 which then sets the appropriate gamma setting in the LUT's 22', 24' and 26'. In one embodiment, each of the LUT's 22', 24' and 26' contain a plurality of gamma value tables and the microprocessor 60 selects the appropriate table to be addressed by the respective color signal. In order to limit the necessary size of each
 5 of the LUT's 22', 24' and 26', another embodiment, the microprocessor 60 calculates the appropriate gamma values for each of the LUT's 22', 24' and 26' and then loads these values into the LUT's 22', 24' and 26'. It should be appreciated that the presetting circuit 38 of Fig. 1 is now incorporated in the microprocessor 60. User input 42 is also connected to the microprocessor 60 and applies a user control signal indicative of a user's desired overall setting
 10 of the gamma correction. Finally, ambient light sensing circuit 44 is connected to the microprocessor 60 via another look-up table (LUT) 62 which translates the voltage signal into a gamma correction code for the microprocessor 60.

[0016] Numerous alterations and modifications of the structure herein disclosed will present themselves to those skilled in the art. However, it is to be understood that the above
 15 described embodiment is for purposes of illustration only and not to be construed as a limitation of the invention. All such modifications which do not depart from the spirit of the invention are intended to be included within the scope of the appended claims.

US?????

CLAIMS:

1. An automatic picture setting adjustment circuit comprising:
 a source for color video signals;
 adjustable gamma correction circuits for each of said color video signals, each
 of said adjustable gamma correction circuits having a control input for receiving a respective
 gamma control signal for controlling an amount of gamma correction performed;
 an ambient light sensing circuit for generating a gamma adjusting signal in
 dependence on a detected amount of ambient light; and
 means for generating said respective gamma control signals from said gamma
 adjusting signal.

2. The automatic picture setting adjustment circuit as claimed in claim 1, wherein
 said source for color signals comprises a matrix circuit for receiving color difference signals
 and a luminance signal, said matrix circuit generating said color video signals.

3. The automatic picture setting adjustment circuit as claimed in claim 1, wherein
 said automatic picture setting adjustment circuit further comprises a presetting circuit for
 providing pre-set signals indicative of an initial operating condition for each of said adjustable
 gamma correction circuits, said generating means generating said respective gamma control
 signals from said pre-set signals and said gamma adjusting signal.

4. The automatic picture setting adjustment circuit as claimed in claim 1, wherein
 said automatic picture setting adjustment circuit further comprises a user input for supplying a
 user control signal indicative of a desired overall setting by a user, said generating means
 generating said respective gamma control signals from said user control signal and said gamma
 adjusting signal.

5. The automatic picture setting adjustment circuit as claimed in claim 1, wherein
 each of said adjustable gamma correction circuits comprises a serial arrangement of a log
 amplifier for receiving the color video signal, a variable gain amplifier coupled to an output of

US?????

the log amplifier, said variable gain amplifier having a control input for receiving the
 5 respective gamma control signal, and an anti-log amplifier coupled to an output of the variable
 gain amplifier, an output of the anti-log amplifier forming an output of the adjustable gamma
 correction circuit.

6. The automatic picture setting adjustment circuit as claimed in claim 5, wherein
 said source for color signals comprises a matrix circuit for receiving color difference signals
 and a luminance signal, said matrix circuit generating said color video signals.

7. The automatic picture setting adjustment circuit as claimed in claim 5, wherein
 said automatic picture setting adjustment circuit further comprises a presetting circuit for
 providing pre-set signals indicative of an initial operating condition for each of said adjustable
 gamma correction circuits, said generating means generating said respective gamma control
 5 signals from said pre-set signals and said gamma adjusting signal.

8. The automatic picture setting adjustment circuit as claimed in claim 5, wherein
 said automatic picture setting adjustment circuit further comprises a user input for supplying a
 user control signal indicative of a desired overall setting by a user, said generating means
 generating said respective gamma control signals from said user control signal and said gamma
 5 adjusting signal.

9. The automatic picture setting adjustment circuit as claimed in claim 1, wherein
 each of said adjustable gamma correction circuits comprise a look-up table in which the
 respective color video signal is applied to an address input, and said generating means
 comprises a microprocessor for calculating the gamma values as said respective gamma control
 5 signals for application to the adjustable gamma correction circuits.

10. The automatic picture setting adjustment circuit as claimed in claim 9, wherein
 said automatic picture setting adjustment circuit further comprises a user input for supplying a
 user control signal indicative of a desired overall setting by a user, said microprocessor
 generating said gamma values from said user control signal and said gamma adjusting signal.

5

US?????

5

ABSTRACT

In a display device having a matrix-type display, an automatic picture setting circuit includes a source for color video signals, and adjustable gamma correction circuits for each of the color video signals. Each of the adjustable gamma correction circuits has a control input for receiving a control signal for controlling an amount of gamma correction performed. In addition, the automatic picture setting circuit includes an ambient light sensing circuit for generating the control signal for the adjustable gamma correction circuits in dependence on a detected amount of ambient light. As such, the automatic picture setting circuit adapts a picture displayed on the display device to the amount of ambient light around the display device thereby assuring an optimum displayed picture.

US?????

EINDHOVEN CLAIMS

1. An automatic picture setting adjustment circuit comprising:
a source (20) for color video signals;
adjustable gamma correction circuits (22, 24, 26) for each of said color video signals, each of said adjustable gamma correction circuits having a control input for receiving a
5 respective gamma control signal for controlling an amount of gamma correction performed;
an ambient light sensing circuit (44) for generating a gamma adjusting signal in dependence on a detected amount of ambient light; and
means (32, 34, 36, 40, 60) for generating said respective gamma control signals from said gamma adjusting signal.
2. The automatic picture setting adjustment circuit as claimed in claim 1, wherein said source (20) for color signals comprises a matrix circuit for receiving color difference signals and a luminance signal, said matrix circuit generating said color video signals.
3. The automatic picture setting adjustment circuit as claimed in claim 1, wherein said automatic picture setting adjustment circuit further comprises a presetting circuit (38) for providing pre-set signals indicative of an initial operating condition for each of said adjustable gamma correction circuits, said generating means (32, 34, 36, 40, 60) generating said
5 respective gamma control signals from said pre-set signals and said gamma adjusting signal.
4. The automatic picture setting adjustment circuit as claimed in claim 1, wherein said automatic picture setting adjustment circuit further comprises a user input (42) for supplying a user control signal indicative of a desired overall setting by a user, said generating means (32, 34, 36, 40, 60) generating said respective gamma control signals from said user
5 control signal and said gamma adjusting signal.
5. The automatic picture setting adjustment circuit as claimed in claim 1, wherein each of said adjustable gamma correction circuits (22, 24, 26) comprises a serial arrangement

US?????

of a log amplifier (50) for receiving the color video signal, a variable gain amplifier (52) coupled to an output of the log amplifier (50), said variable gain amplifier (52) having a control
 5 input (54) for receiving the respective gamma control signal, and an anti-log amplifier (56) coupled to an output of the variable gain amplifier (52), an output of the anti-log amplifier (56) forming an output of the adjustable gamma correction circuit.

6. The automatic picture setting adjustment circuit as claimed in claim 5, wherein said source (20) for color signals comprises a matrix circuit for receiving color difference signals and a luminance signal, said matrix circuit generating said color video signals.

7. The automatic picture setting adjustment circuit as claimed in claim 5, wherein said automatic picture setting adjustment circuit further comprises a presetting circuit (38) for providing pre-set signals indicative of an initial operating condition for each of said adjustable gamma correction circuits, said generating means (32, 34, 36, 40) generating said respective
 5 gamma control signals from said pre-set signals and said gamma adjusting signal.

8. The automatic picture setting adjustment circuit as claimed in claim 5, wherein said automatic picture setting adjustment circuit further comprises a user input (42) for supplying a user control signal indicative of a desired overall setting by a user, said generating means (32, 34, 36, 40) generating said respective gamma control signals from said user control
 5 signal and said gamma adjusting signal.

9. The automatic picture setting adjustment circuit as claimed in claim 1, wherein each of said adjustable gamma correction circuits comprise a look-up table (22', 24', 26') in which the respective color video signal is applied to an address input, and said generating means comprises a microprocessor (60) for calculating the gamma values as said respective
 5 gamma control signals for application to the adjustable gamma correction circuits.

10. The automatic picture setting adjustment circuit as claimed in claim 9, wherein said automatic picture setting adjustment circuit further comprises a user input (42) for supplying a user control signal indicative of a desired overall setting by a user, said

US?????

microprocessor (60) generating said gamma values from said user control signal and said
5 gamma adjusting signal.

1/2

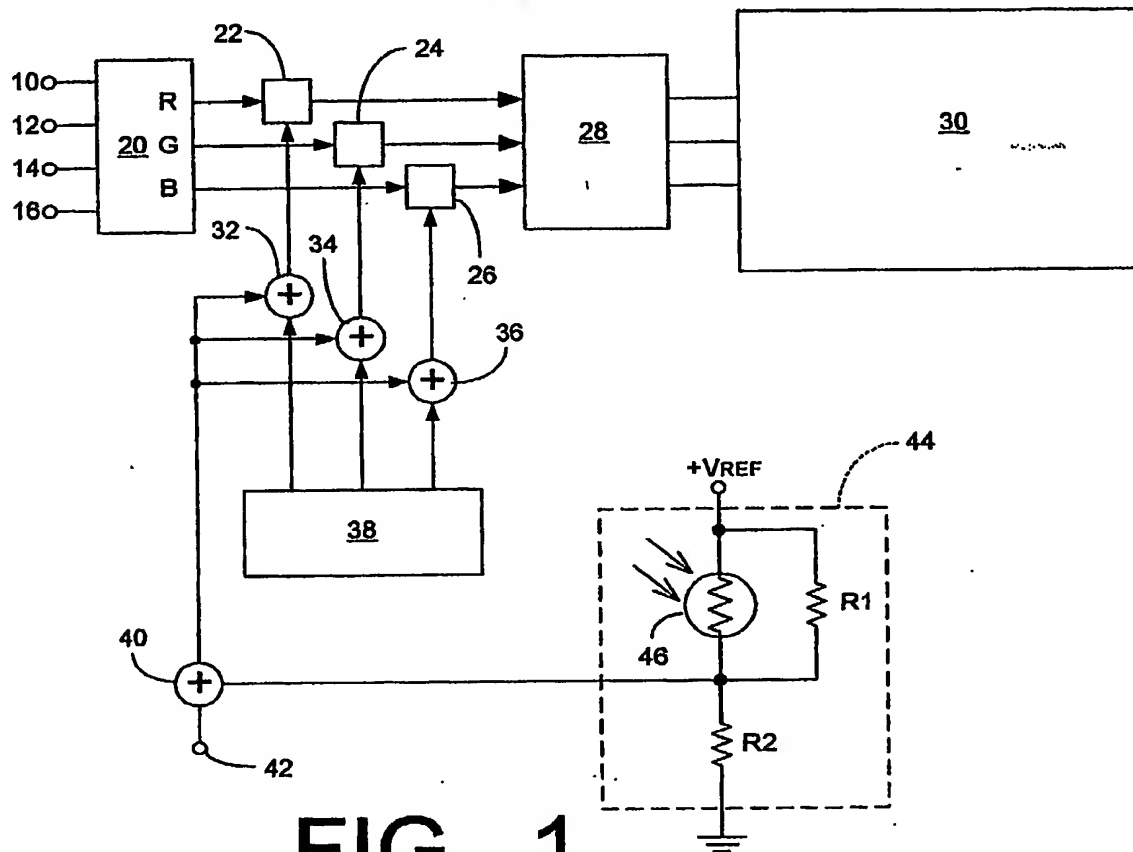


FIG. 1

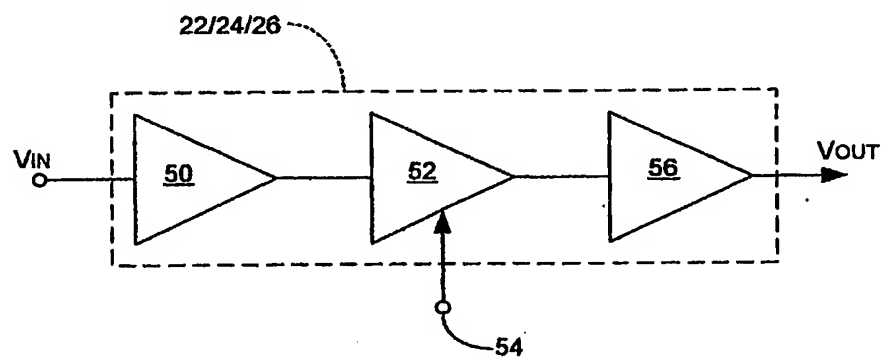


FIG. 2

2/2

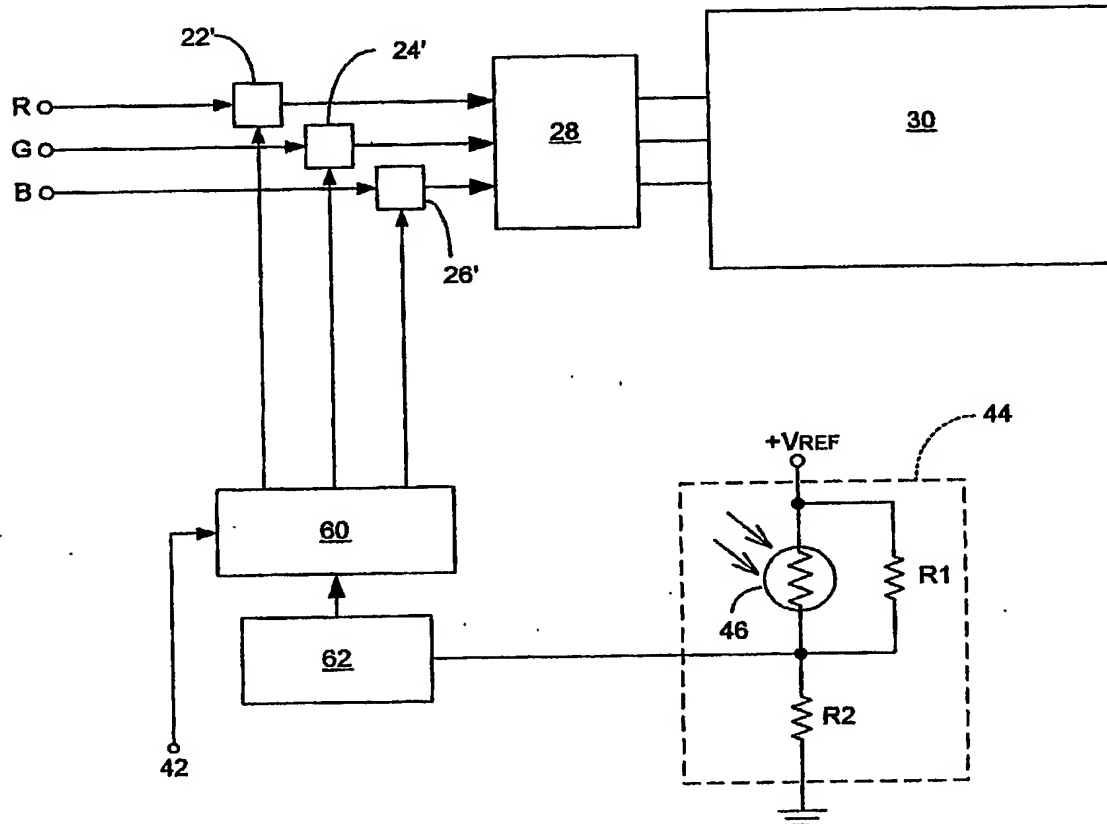


FIG. 3